


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

2X \varnothing .219
SECURE BARREL BOLT
OUTSIDE ENCLOSURE
WITH 2X 10-24 SCREWS
FROM INSIDE ENCLOSURE

6X \varnothing .219
SECURE WITH 6X 10-32
HEX HEAD BOLTS

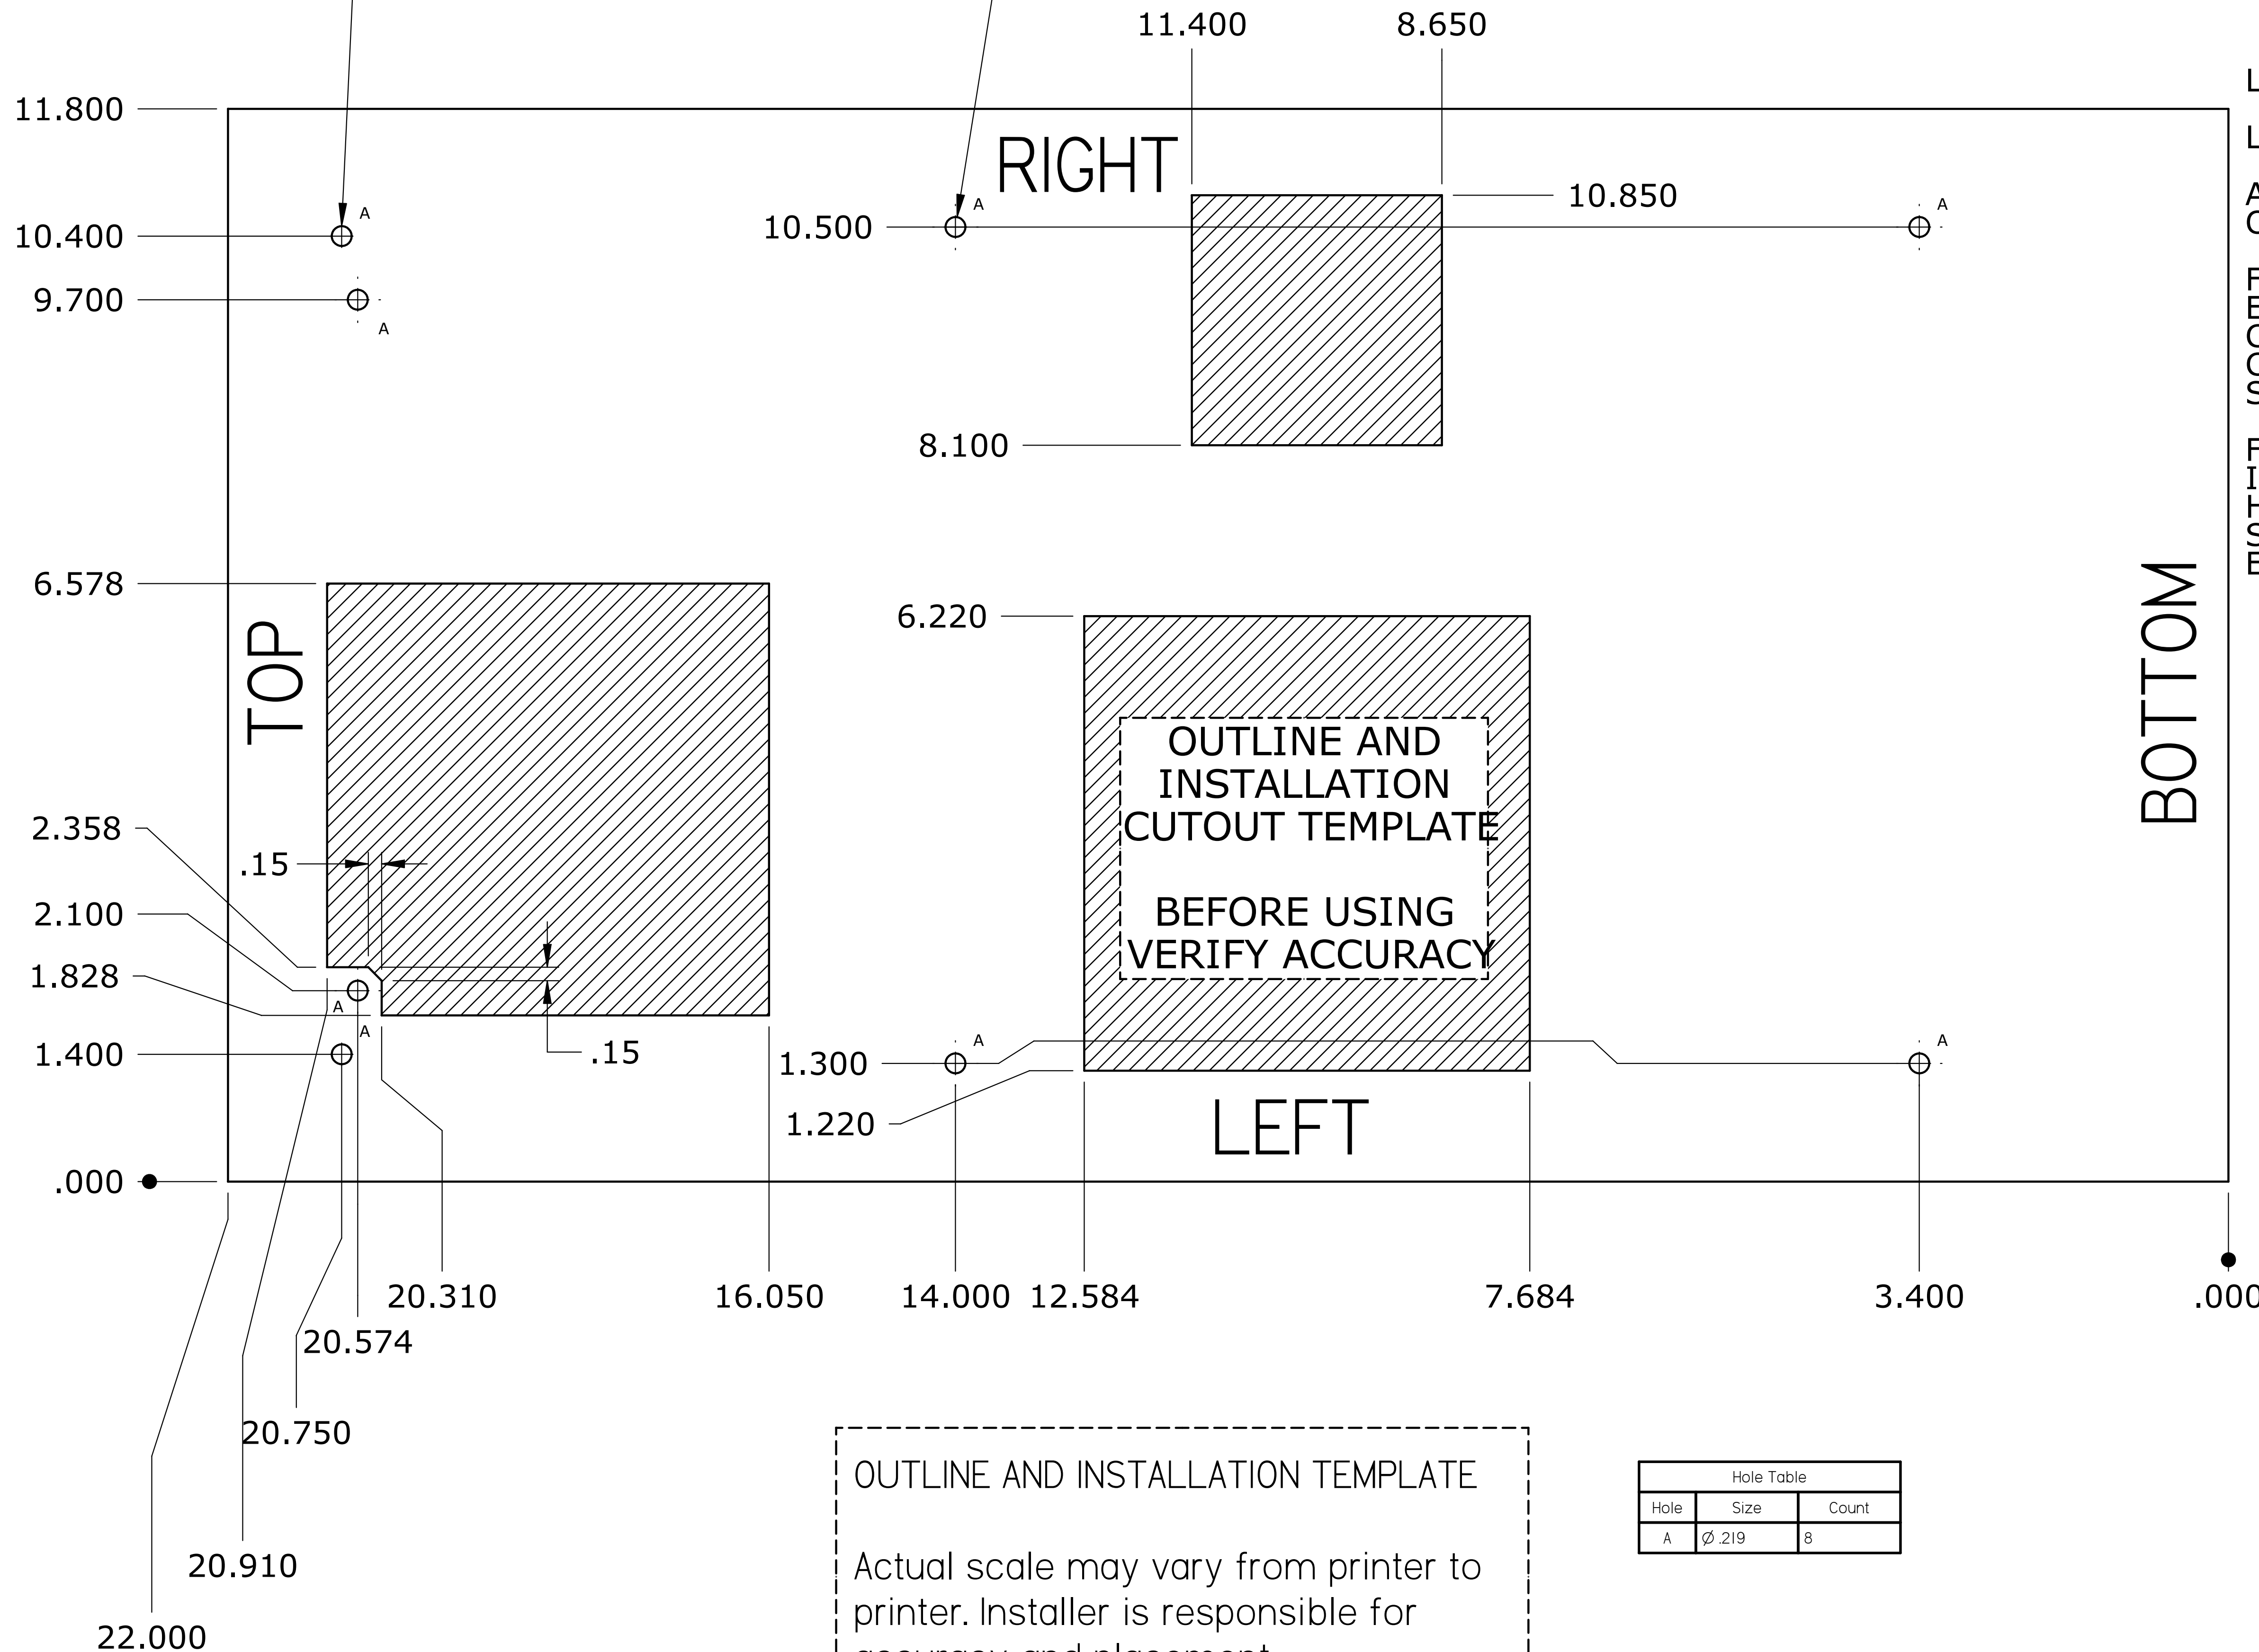

LOCATE DESIRED ELEVATION
LOCATE CUTOUTS AND HOLES
APPLY GASKET TO MOUNTING FACE OF UNIT.
FASTEN 2 BARREL BOLTS OUTSIDE ENCLOSURE AND HANG AIR CONDITIONER BY THE AIR CONDITIONER'S KEYHOLE SLOTS AT THE TOP.
FASTEN AIR CONDITIONER FROM INSIDE ENCLOSURE WITH 6 X 10-32 HEX HEAD BOLTS (1/2" LONG SUPPLIED FOR UP TO 12 GA. ENCLOSURES)

OUTLINE AND INSTALLATION TEMPLATE
Actual scale may vary from printer to printer. Installer is responsible for accuracy and placement.

Hole Table		
Hole	Size	Count
A	\varnothing .219	8

NAME	DATE	TITLE	SCALE	WEIGHT	SHEET
DRAWN: dakins	03/13/08	INSTALLATION TEMPLATE NE010			1 OF 1
CHECKED:					
ENG APPR:					
MGR APPR:					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ANGLES ±1° or 1 PL ±0.5° 2 PL ±0.02 3 PL ±0.010			SCALE:	WEIGHT:	SHEET 1 OF 1