REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

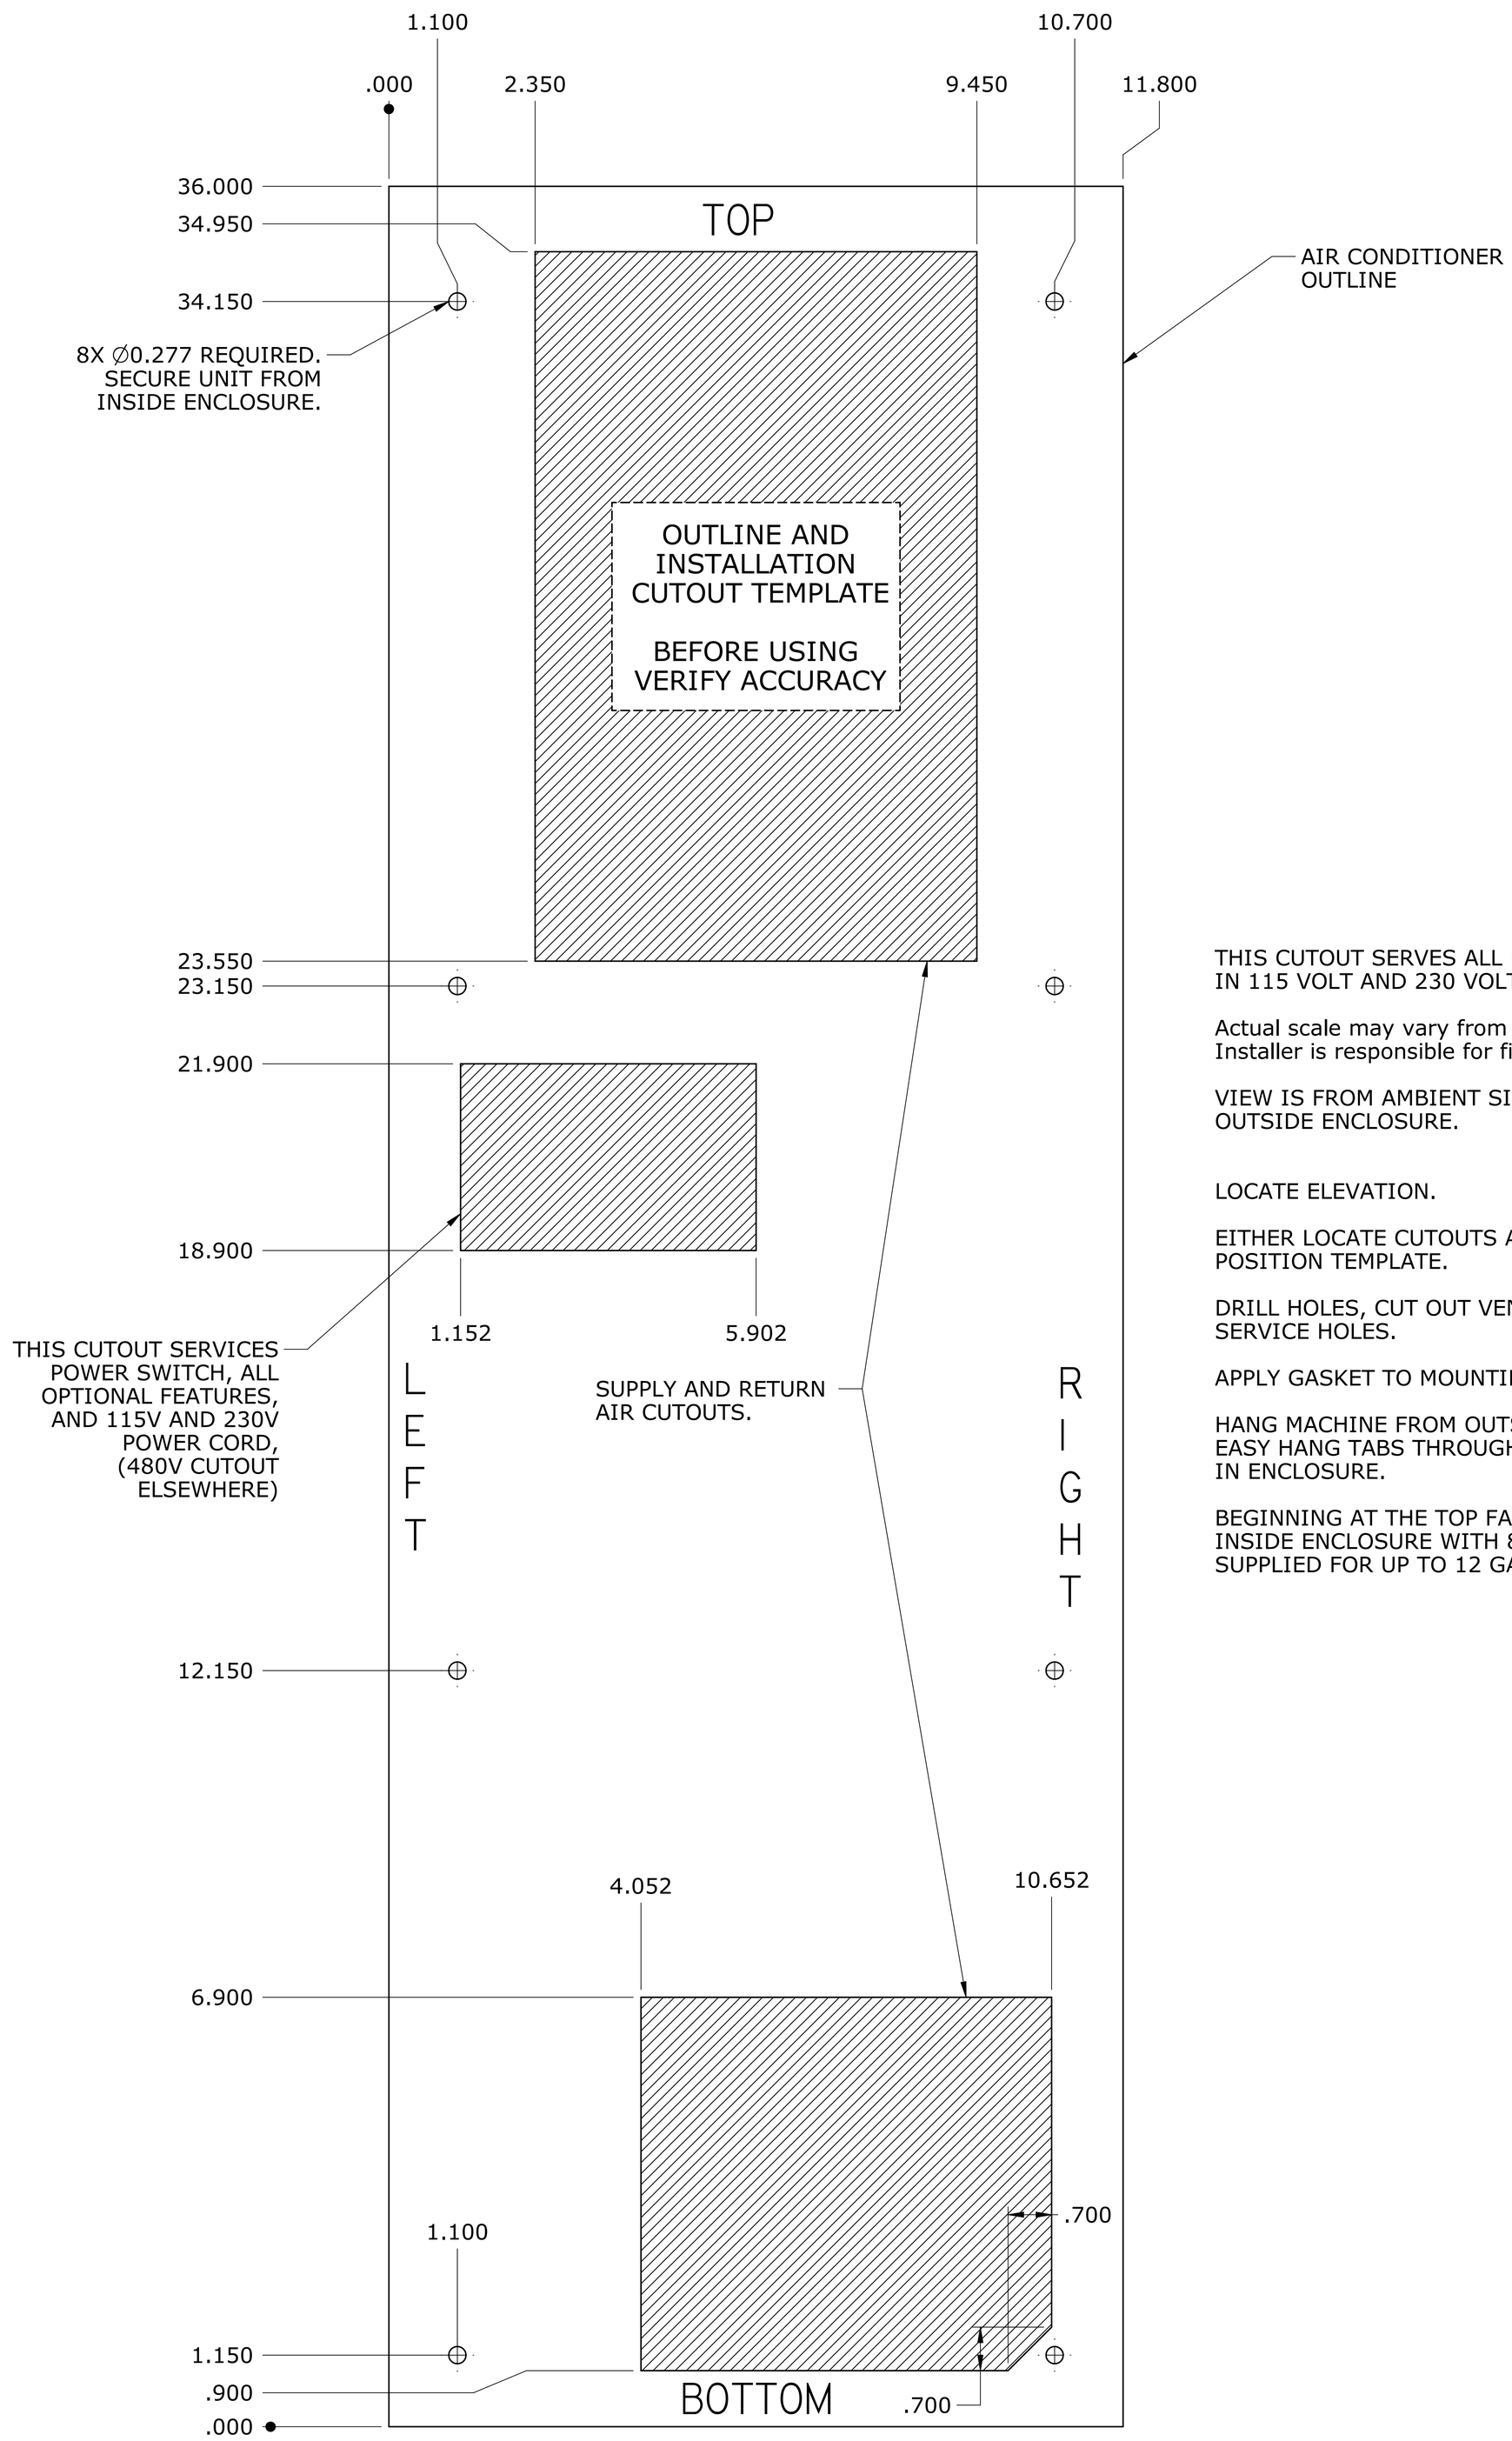

THIS CUTOUT SERVES ALL NE050 (5000 BTU/H) IN 115 VOLT AND 230 VOLT APPLICATIONS.

Actual scale may vary from printer to printer. Installer is responsible for final placement.

VIEW IS FROM AMBIENT SIDE, OUTSIDE ENCLOSURE.

LOCATE ELEVATION.

EITHER LOCATE CUTOUTS AS DIMENSIONED OR POSITION TEMPLATE.

DRILL HOLES, CUT OUT VENTILATION AND SERVICE HOLES.

APPLY GASKET TO MOUNTING FACE OF A/C.

HANG MACHINE FROM OUTSIDE ENCLOSURE ON EASY HANG TABS THROUGH EVAPORATOR OPENING IN ENCLOSURE.

BEGINNING AT THE TOP FASTEN AIR CONDITIONER FROM INSIDE ENCLOSURE WITH 8 BOLTS OR SCREWS (3/4" LONG SUPPLIED FOR UP TO 12 GA. ENCLOSURES).

	NAME	DATE
DRAWN	atittle	02/16/09
CHECKED		
ENG APPR		
MGR APPR		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
ANGLES ±1° or 1 PL ±0.5°
2 PL ±0.02 3 PL ±0.010

TITLE **INSTALLATION CUTOUT TEMPLATE NE050 GENERATION II CHASSIS**

SIZE E | DWG NO NE050 CUTOUT | REV

FILE: isc_ne_050-G2_cutout.dft

SCALE: | WEIGHT: | SHEET 1 OF 1