




PLASTIC FILTERED FAN PACKAGES

Injection Molded Plastic

20 Years
Of
Excellence

- Easy "Click and Fit" Installation
- Reusable Multilayered Electrostatic Polypropylene Filter
- Finger Guards on All Models
- All Kits Include Gaskets, Mounting Hardware and Template
- All Kits Include Both Fan Side and Return
- Efficient, Quiet Ball Bearing Fans

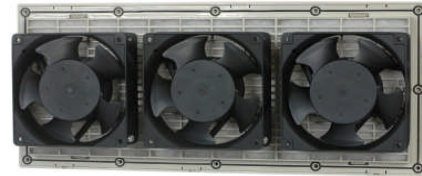

UL 508A Component Recognized
File Number
E319601






Please note that finger guards are shown on drawings.

Model	CFM Free Flow	Voltage/Hz	Rated Amps	Temperature Range	RPM
ISC-080PFFP-126	81	115 / 50/60	0.11	-4F to +176F	2900
ISC-080PFFP-236	81	208-230 50/60	0.06	-4F to +176F	2900
ISC-080PFFP-24V	86	24 VDC	0.23	-4F to +176F	3000
ISC-100PFFP-126	131	115 / 50/60	0.18	-4F to +176F	3300
ISC-100PFFP-236	131	208-230 50/60	0.11	-4F to +176F	3300
ISC-100PFFP-24V	140	24 VDC	0.58	-4F to +176F	3450
ISC-200PFFP-126	300	115 / 50/60	0.50	-4F to +176F	3300
ISC-200PFFP-236	300	208-230 50/60	0.33	-4F to +176F	3300
ISC-200PFFP-24V	300	24 VDC	1.42	-4F to + 167F	3300
ISC-390PFFP-126	393	115 / 50/60	.54	-4F to +176F	3300
ISC-390PFFP-236	393	208-230 50/60	.30	-4F to +176F	3300
ISC-390PFFP-24V	393	24 VDC	1.74	-4F to +176F	3450
ISC-500PFFP-126	850	115 / 50/60	0.65	-4F to 158F	2700
ISC-500PFFP-236	850	208-230 50/60	0.33	-4F to 158F	2700





PLASTIC FILTERED FAN PACKAGES

Injection Molded Plastic




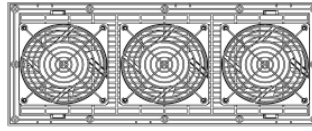

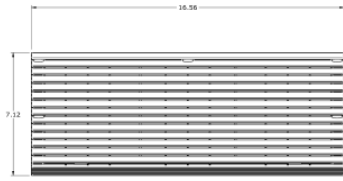


PFFP-390 / 393 CFM

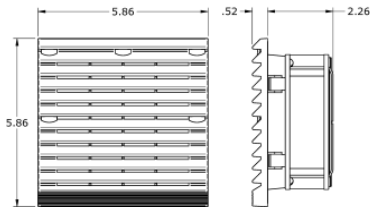

PFFP-080 / 81 CFM

PFFP-100 / 131 CFM

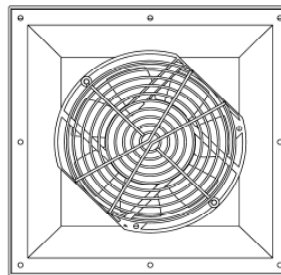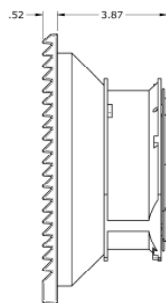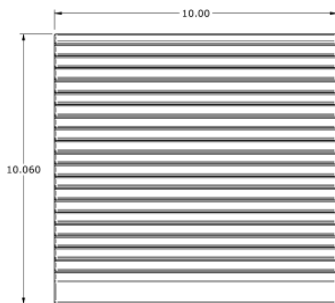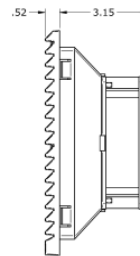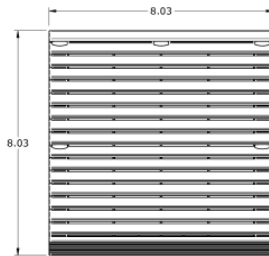

PFFP-200 / 300 CFM

PFFP-500 / 850 CFM

