



ENCLOSURE AIR CONDITIONERS

20,000 BTUH - High Capacity Series

Engineered & manufactured to endure the most difficult of environments and applications.
ISC Air Conditioners will exceed environmental requirements in applications like
Steel, Food Processing, Petro-Chemical, Cement, Paper & Pulp and Plastics

Digital Temperature Controller

- » Programmable set point and temperature operating controls
- » Visible error and/or alarm messaging
- » System status indication
- » Password protection

Independent Active Condensate Management System

- » Complete elimination of condensate
- » Eradicates condensate without corrosive contact with coils

Unit Efficiency

- » Pressure operated blower control reduces power inrush and saves energy
- » Highly efficient rotary compressor
- » Fully insulated & sealed cabinet
- » Temperature Control Valve provides a broad temperature range while maintaining cooling capacity

Industrial Construction

- » Free standing rigid chassis eases maintenance

Compressor Protection System

- » High & Low refrigerant cutoffs with fault indication
- » Compressor anti short cycle protection
- » Compressor run capacitors reduce power inrush, save energy and increase compressor life



Options

- » External Alarm Capabilities
- » Open Door Kill Switch
- » Corrosive Environment Package
- » Low Ambient Package
- » Dry Contact Remote Monitoring Options
- » Integrated Enclosure Heater System
- » Hazardous Location Package



No Water Drips
 from our Enclosure
 Air Conditioners




Made in the USA


Model	BTUH/ Hour	Material	Voltage/ Phase/Hz.	Running Amps	Max Ambient Temperature	Dimensions H x W x D	Weight (lbs.) Unit/Ship
ISC-HC-201-236-12	20,000	Powder Coated Steel	230/1/60	13.70	131°F	56.09" x 23" x 15.03"	205/226
ISC-HC-201-236-04	20,000	Powder Coated Steel	230/1/60	13.70	131°F	56.09" x 23" x 15.03"	205/226
ISC-HC-201-236-4X	20,000	Stainless Steel	230/1/60	13.70	131°F	56.09" x 23" x 15.03"	205/226
ISC-HC-201-486-12	20,000	Powder Coated Steel	480/1/60	6.56	131°F	65.7" x 23" x 15.03"	320/342
ISC-HC-201-486-04	20,000	Powder Coated Steel	480/1/60	6.56	131°F	65.7" x 23" x 15.03"	320/342
ISC-HC-201-486-4X	20,000	Stainless Steel	480/1/60	6.56	131°F	65.7" x 23" x 15.03"	320/342

*Information is Subject to Change without Notice

HC201 Performance Data & Specifications

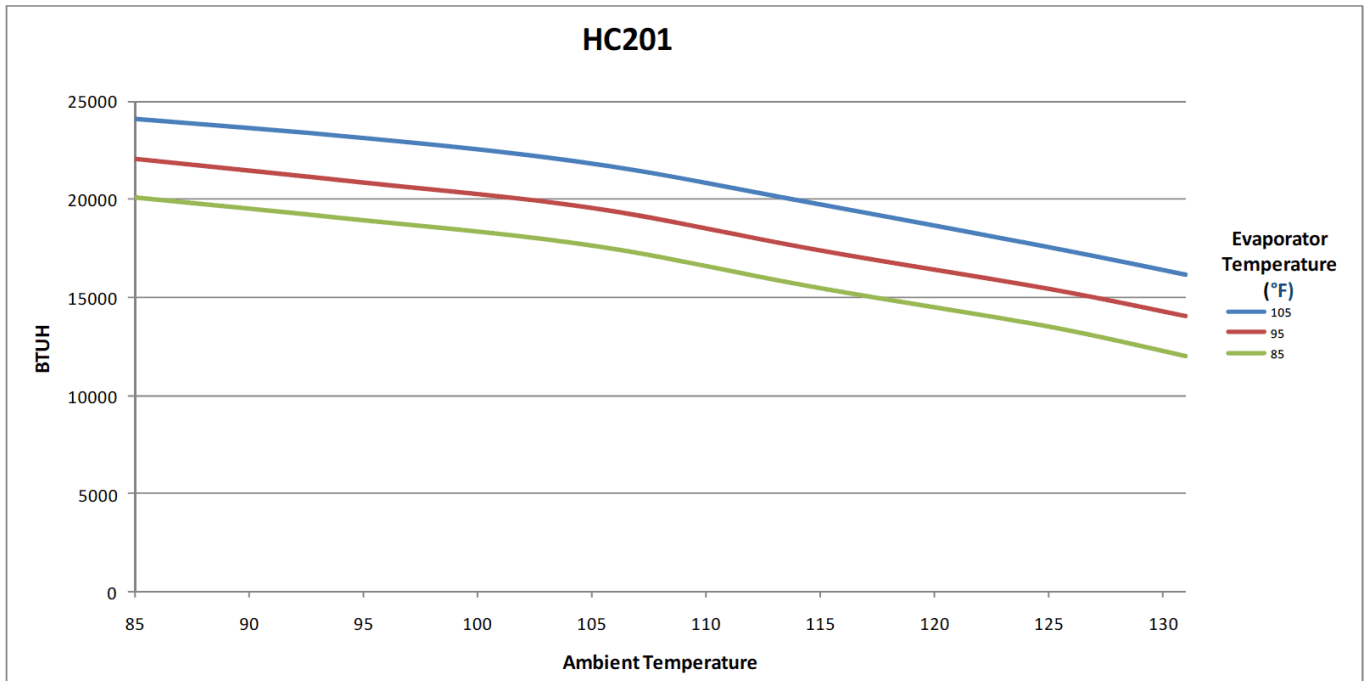

*Testing done under controlled conditions. Actual performance may vary

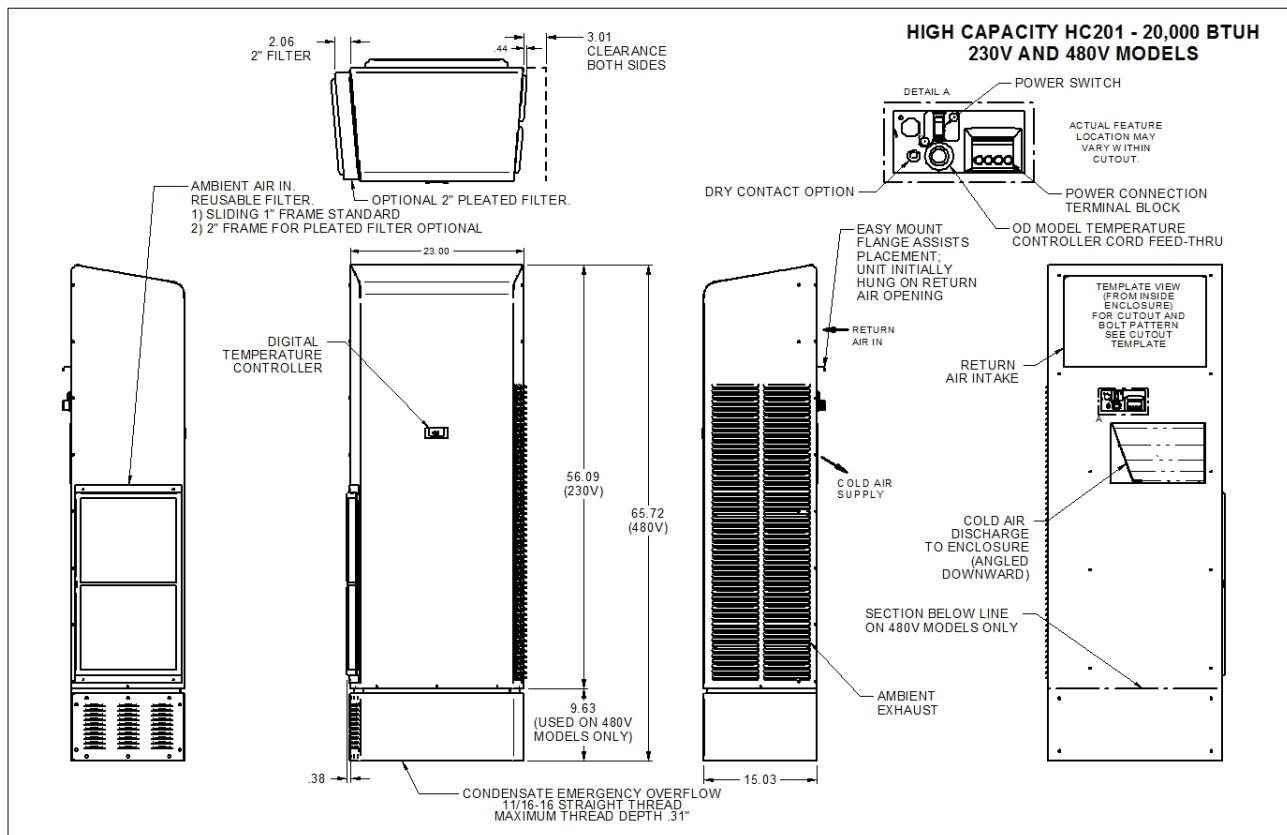

*Information is Subject to Change without Notice